



HST-610L-R


Pro Automatic Barrier Gate

The HST-610L-R Pro offers brand-new automatic barrier gates equipped with telescopic boom arm that allows direction exchanging according to site application and a silver housing with built-in LED indicating the state of the parking barrier, providing humanized user experience.

Features

- ✓ Auxiliary traffic lights in the main body
- ✓ Support anti-smash automatic closing
- ✓ Opening and closing angle of $90^{\circ} \pm 2^{\circ}$
- ✓ Opening time: 0.8 s Material: 1.5mm
- ✓ Over 5 million times Arm
- ✓ Protection Class : IP55 weather proof

Dimensions

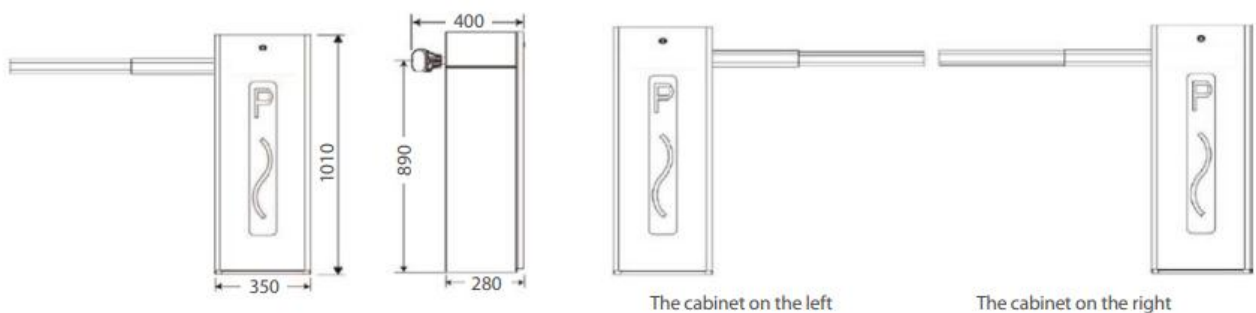

| Model | HST-610L 3 sec 6M | HST-610R 3 sec 6M | HST-610L 0.8 sec 4M | HST-610R 0.8 sec 4M |
|-------------|-------------------|-------------------|---------------------|---------------------|
| Arm | Max 6 m | Max 6 m | Max 4 m | Max 4 m |
| control | Left | Right | Left | Right |
| Voltage | AC110V/220V, | AC110V/220V, | AC110V/220V, | AC110V/220V, |
| Consumption | Power:120W | Power:120W | Power:120W | Power:120W |
| Remote | ≤30m | ≤30m | ≤30m | ≤30m |
| Material | :1.5mm stainless | :1.5mm stainless | :1.5mm stainless | :1.5mm stainless |
| Temperature | :-35 to 75 degree | :-35 to 75 degree | :-35 to 75 degree | :-35 to 75 degree |
| Size | 380*390*1010mm | 380*390*1010mm | 380*390*1010mm | 380*390*1010mm |
| Protection | Class:IP55 | Class:IP55 | Class:IP55 | Class:IP55 |
| speed | :1400rpm | :1400rpm | :1400rpm | :1400rpm |
| Net Weight | 45kg | 45kg | 45kg | 45kg |

