

iFace 402

Multi-biometric Identification Time Attendance and Access Control Terminal



iFace402 multi-biometric identification time attendance and access control terminal adopts ZKTeco's latest platform with ZKFace algorithm and large capacity memory. With the upgraded hardware, it can now store up to 1200 face templates.

It Integrated with 800MHz high speed ZK Multi-Bio processor and high definition infrared camera enables user identification in the dark environment. Face and fingerprint multi-biometric identification methods make it more applicable. Multi-model communications consisting of RS232/485, TCP/IP and Wi-Fi/GPRS (optional) allow an extremely easy data management. Optional built-in 2000 mAh battery eliminates the trouble of power failure.


Feature

- Identification methods include Face, Fingerprint/Rfid and/or Password
- Elegant ergonomic design
- 4.3" TFT touch screen is user-friendly and very intuitive
- 6 user-defined function keys
- Contact relays for door access control (wires to door strike or 3rd party panel)
- Web server management software via IE browser.
- Optional extendable scheduled-bell
- Infra-red optical system enables user-identification in poorly lit environments
- Optional built-in battery backup provides approx 4 hours continuous operation
- Optional built-in wireless Wi-Fi or GPRS for wireless communication
- Built-in contacts for 3rd party electric lock, door sensor, alarm, exit button, or bell
- Wiegand Output for connections to 3rd party access control panels


Specifications

| | |
|------------------------------------|--|
| Display | 4.3" TFT touch screenFace 1200 (1:N) |
| Face capacity | 1200 (1:N) |
| Fingerprint capacity | 2000 |
| ID Card capacity | 10,000 |
| Logs capacity | 100,000 |
| Algorithm Version | ZK Face 7.0 & ZK Finger 10.0 |
| 2000mAh backup battery | Optional |
| Communication | TCP/IP,RS232/485 |
| USB-HOST | Two USB-Host |
| Wireless Wi-Fi | Optional |
| Time attendance Standard functions | ID Card(Optional), Automatic Status Switch, Self-Service Query, Work Code, T9 input, 9 digit user ID, DLST |
| Access control interfaces for | 3rd party electric lock, door sensor, exit button |
| Wiegand Signal | Output |
| Optional functions | Serial printer, Mifare card, Extendable Scheduled-bell, Short Message, Web-server, GPRS |
| Power supply | 12VDC 3A |
| Verification Speed | ≤2 sec |
| Operating temp | 0 °C- 45 °C |
| Operating Humidity | 20%-80% |
| Dimension(W×H×D) | 193.6×165×111 mm |
| Gross Weight | 1.75 kg |


Configuration

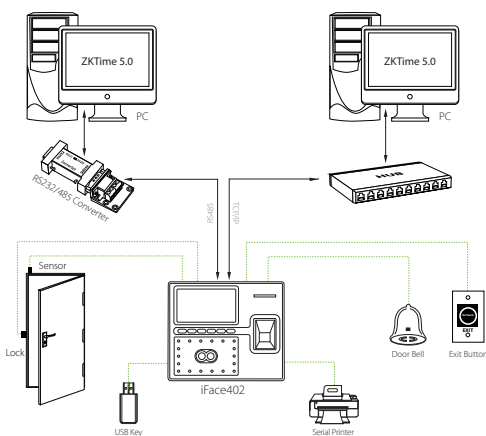


What's in the Box




iFace402



Back Plate



Power Adapter



Backup Battery(Optional)




Software CD (ZKTime 5.0)



Mounting Paper



Screws and Holders



Star-shape Screw Driver

ZKTeco Inc.

ZK Mansion, Wuhe Rd, Gangtou, Bantian, Buji Town, Longgang District, Shenzhen China 518129
 Tel: 86-755-8960 2345/46/47/48
 E-mail: sales@zkteco.com
 www.zkteco.com

Global Offices:

USA: +1 732-412-6007
 EU: +34 916532891
 Brazil: +55 31 2515-8326
 Thailand: +66-027199154
 Mexico: +52-55-52928418

South Africa: +27 12 259 1047
 Egypt: +201110444134
 Dubai: +971 4 6091 310
 India: +91 8123536788
 Indonesia: +62 21 2921 8949

Vietnam: +84-0169-5813007
 Philippines: +63 9084118832
 Russia: +8 915 178-46-81